



Handheld Vector Network Analyzer

PNB-60
100 kHz - 6 GHz

PNB-60 Overview.

FOCUS ON HIGH-QUALITY S-PARAMETER MEASUREMENTS AND PORTABILITY

The PNB-60 delivers high-quality two-port S-parameter measurements, featuring a high-performance directional coupler with ≥ 40 dB effective directivity and a professional receiver design providing 100–120 dB dynamic range. It combines excellent portability with an interactive experience comparable to a benchtop VNA, featuring a 10.1-inch high-resolution, high-brightness touchscreen and weighing only 1.4 kg. This breakthrough combination of professional performance and portability gives the PNB-60 a much broader range of applications than conventional VNAs, enabling easy deployment and operation in both the laboratory and the field.

HIGH USABILITY AND MEASUREMENT CONFIDENCE

The PNB-60 can be paired with the ECB-60 electronic calibration module and verified amplitude- and phase-stable cables to form a complete test solution. The dedicated ECB-60 significantly simplifies calibration while providing sufficient accuracy for most applications. The verified cables help prevent measurement errors caused by poor cable performance. Together with VNStudio, the PNB-60 provides an interactive experience comparable to, or even more convenient than, a benchtop VNA, making instrument setup, calibration, and S-parameter measurements more intuitive and efficient.

Key Features

- Frequency Range: 100 kHz to 6 GHz
- Number of Ports: 2 ports
- High-performance directional coupler with effective directivity ≥ 40 dB
- Output power: -35 dBm to +5 dBm
- Dynamic range: 100 dB to 120 dB (typ.)
- Trace noise: ≤ 0.003 dBrms (typ.)
- IF bandwidth: 15 Hz to 75 kHz
- Sweep speed: 150 us/point at 75 kHz IF bandwidth
- ECB-60 electronic calibration module (std.)
- Amplitude- and phase-stable cables (std.)
- Supports SCPI commands
- 5-hour battery life with power bank support
- 1.4 kg portable design with a 10.1-inch multi-touch display

PNB-60 Interface Description



VNStudio Software Overview*

■ Clear and User-Friendly Interface

VNStudio features a modular interface with five clearly organized functional areas: the menu bar, measurement display area, graph settings area, parameter settings area, and status information bar.



■ Two-Port S-Parameter Measurements

Supports S11, S12, S21, and S22 measurements with multiple display formats, including logarithmic magnitude, linear magnitude, phase, real, imaginary, SWR, and Smith chart. Suitable for network parameter measurements of RF devices such as filters, amplifiers, cables, and antennas.




■ Flexible Sweep and Scenario Configuration

Supports linear frequency, logarithmic frequency, power, and CW sweeps, with configurable IF bandwidth, sweep points, averaging, and dwell time. Built-in measurement scenarios for typical devices allow quick recall of sweep and trace configurations for efficient setup.



■ Automatic Search and Analysis

Supports bandwidth and X dB searches for quick extraction of key frequency characteristics from traces. DTF analysis converts frequency-domain measurements to the time or distance domain, with multiple transform modes, display formats, and window functions to help locate impedance discontinuities in cables and other devices.

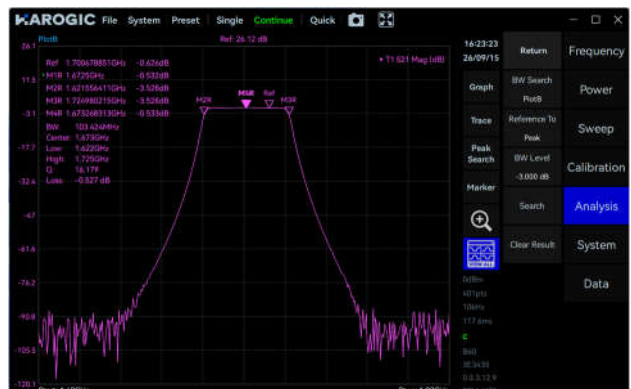

Specifications*

FREQUENCY

Frequency range	100 kHz to 6 GHz
Frequency resolution	≤ 10 Hz
Reference clock	Internal or external
Frequency stability	$< \pm 2.5$ ppm
Aging rate	≤ 1 ppm/year
Sweep points	11 to 65535
IF Bandwidth Range	15 Hz to 75 kHz

S-PARAMETER MEASUREMENT CAPABILITY

Dynamic range 15 Hz IF Bandwidth	100 kHz to 1 MHz	90 dB, 100 dB (typ.)	
	1 MHz to 10 MHz	100 dB, 105 dB (typ.)	
	10 MHz to 3 GHz	115 dB, 120 dB (typ.)	
	3 GHz to 4.5 GHz	110 dB, 115 dB (typ.)	
	4.5 GHz to 6 GHz	110 dB, 115 dB (typ.)	
Corrected System Performance (typ.)	Frequency Range	85033E Mechanical Calibration Kit	ECB-60 Electronic Calibration Module
Directivity	100 kHz to 1 MHz	45 dB	32 dB
	1 MHz to 10 MHz	50 dB	45 dB
	10 MHz to 4.5 GHz	50 dB	48 dB
	4.5 GHz to 6 GHz	44 dB	42 dB
Load match	100 kHz to 1 MHz	40 dB	30 dB
	1 MHz to 10 MHz	46 dB	44 dB
	10 MHz to 4.5 GHz	48 dB	46 dB
	4.5 GHz to 6 GHz	44 dB	42 dB
Source match	100 kHz to 1 MHz	42 dB	25 dB
	1 MHz to 10 MHz	46 dB	44 dB
	10 MHz to 4.5 GHz	46 dB	38 dB
	4.5 GHz to 6 GHz	42 dB	32 dB
Transmission tracking	100 kHz to 1 MHz	± 0.05 dB	± 0.15 dB
	1 MHz to 10 MHz	± 0.03 dB	± 0.05 dB
	10 MHz to 4.5 GHz	± 0.02 dB	± 0.08 dB
	4.5 GHz to 6 GHz	± 0.02 dB	± 0.15 dB

Reflection tracking	100 kHz to 1 MHz	± 0.05 dB	± 0.40 dB
	1 MHz to 10 MHz	± 0.03 dB	± 0.05 dB
	10 MHz to 4.5 GHz	± 0.03 dB	± 0.06 dB
	4.5 GHz to 6 GHz	± 0.03 dB	± 0.10 dB
Trace noise	10 MHz to 6 GHz 1kHz IF Bandwidth	0.003 dBrms / 0.02 degree rms (typ.)	
Sweep Speed	10 MHz to 6 GHz, 201 points, uncalibrated or one- port calibration	75 kHz IF Bandwidth	45 ms
		10 kHz IF Bandwidth	61 ms
		1 kHz IF Bandwidth	250 ms
	10 MHz to 6 GHz, 201 points, two- port calibration	75 kHz IF Bandwidth	51 ms
		10 kHz IF Bandwidth	85 ms
		1 kHz IF Bandwidth	450 ms

POWER

Range	100 kHz to 10 MHz	-35 dBm to -4 dBm
	10 MHz to 6 GHz	-35 dBm to +5 dBm
Resolution	0.25 dB	
Accuracy	± 1.5 dB	

GENERAL

Input and output		
RF Ports	Port 1 and Port 2, N (F), impedance 50 Ω Damage input level: +20 dBm or ±35 VDC	
Power	USB PD (65 W), supports power bank operation	
USB Ports	USB 3.0 Type-C * 1, USB 2.0 Type-C * 1, USB 2.0 Type-A * 1	
Ethernet Port	RJ45, 1000 Mbps, supports remote control over LAN	
Video and Audio Interfaces	Micro HDMI * 1 (supports external display), 3.5 mm headphone jack * 1	
External Reference Clock Input	MMCX (F), 10 MHz, allowable input level: -8 dBm to +10 dBm	
External Trigger Input	MMCX (F), 3.3 V CMOS, high impedance	
Trigger Output	MMCX (F), 3.3 V CMOS, high impedance	
Display	10.1-inch IPS LCD, 1280 × 800, multi-touch	
Power Consumption	≤ 15 W	
Operating Time	5 hours (typ.)	
Dimensions (L × W × H)	260 × 185 × 46 mm	
Weight	≤ 1.4 kg	
Operating Temperature (Ambient)	0 to 50 °C	

Storage (Ambient)	Temperature	-20 to +70 °C	
Operating humidity	relative	Ambient Temp.: 0 to 40 °C	5 to 75%
		Ambient Temp.: > 40 °C	5 to 45%
Packaging accessories	PNB-60 main unit * 1, power adapter * 1, power cord * 1, ECB-60 electronic calibration module * 1, matched loads * 2, USB cable * 1, CKB Series armored amplitude- and phase-stable cables * 2, SMA female-to-female adapter * 1, wrench set * 1		

- *Specifications apply under the following conditions:
- (1) Dynamic range: IF bandwidth of 15 Hz, output power of +5 dBm; ambient temperature of 25 °C (± 3 °C), with a deviation from the calibration temperature of < 1 °C.
 - (2) Corrected system performance: IF bandwidth of 15 Hz; ambient temperature of 25 °C (± 3 °C), with a deviation from the calibration temperature of < 1 °C.
 - (3) Typical and nominal values are not guaranteed and do not include measurement uncertainty.
 - (4) Calibration includes SOLT and isolation calibration by default.
 - (5) Specifications are subject to change with hardware and software revisions without notice.

Standard Accessories

Electronic Module	Calibration	ECB-60, 100 kHz to 6 GHz
RF Test Cable	CKB Series armored amplitude- and phase-stable RF cable	

PNB-60 Measurement Kit Overview



